

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Inventor: Richard A. SMITH
 Title WIRELESS INTERNET GATEWAY
 Attorney Docket No.: 20-465

PATENT APPLICATION TRANSMITTAL LETTER

Box PATENT APPLICATION

Assistant Commissioner for Patents
 Washington, D.C. 20231

Sir:


Enclosed are the following papers relating to the above-named application for patent:
 (1) specification (including claims and Abstract) - 40 pages; (2) 18 informal sheets of drawings;
 (3) an Assignment with Cover Sheet - 3 pages; (4) a signed Declaration and Power of Attorney
 - 2 pages; and (5) a check in the amount of \$952 for the filing fee calculated as follows:

CLAIMS AS FILED				
	NO. FILED	NO. EXTRA	RATE	CALCULATIONS
Total Claims	32 - 20 =	12	x \$18 =	\$216
Independent Claims	6 - 3 =	3	x \$78 =	\$234
Multiple Dependent Claim(s), if applicable			\$260 =	0
Basic Fee				\$690
Assignment Recordation				\$40
TOTAL FEE:				\$1180

The Commissioner is authorized to charge any additional fees due or credit any overpayments to **Deposit Account No. 50-0687 under Order No. 20-465**. A copy of this letter is enclosed.

Please address all correspondence to **FARKAS & MANELLI, PLLC, 2000 M Street, N.W. 7th Floor, Washington, DC 20036-3307**, and all telephone calls to William H. Bollman at (202) 261-1000.

Respectfully submitted,


 William H. Bollman
 Reg. No.: 36,457
 Attorney for Applicants

Date: August 2, 2000

Farkas & Manelli, PLLC
 2000 M Street, N.W. 7th Floor
 Washington, DC 20036-3307
 (202) 261-1000

APPLICATION UNDER UNITED STATES PATENT LAWS

Invention: **WIRELESS INTERNET GATEWAY**

Inventor(s): Richard A. SMITH

FARKAS & MANELLI pllc

2000 M Street, N.W., Suite 700
Washington, D.C. 20036-3307

Attorneys

Telephone: (202) 261-1000

This is a:

- ☐ [] Provisional Application
- ☒ [X] Regular Utility Application
- ☐ [] Continuing Application
- ☐ [] PCT National Phase Application
- ☐ [] Design Application
- ☐ [] Reissue Application
- ☐ [] Plant Application

SPECIFICATION

002030" 21/202560

WIRELESS INTERNET GATEWAY

BACKGROUND OF THE INVENTION

1. Field of the Invention

5 This invention relates generally to wireless carriers, Internet service providers (ISPs), and information content delivery services/providers. More particularly, it relates to wireless telecommunications and wireless portals for routing messages from mobile devices to Internet destinations.

2. Background of Related Art

10 Short Message Service Centers (SMSCs) deliver short messages through a wireless network. Typically they operate on highly valuable server platforms that are protected deep within a wireless carrier's network, and communicate via specialized protocols.

15 Fig. 11 shows a conventional gateway providing Internet access to a wireless network through a short message service center (SMSC).

20 In particular, as shown in Fig. 11, a gateway **900** translates between HTTP protocol messages from the Internet **190** and SMPP protocol messages to wireless devices in a wireless network **130** via an SMSC **120**.

25 The gateway **900** provides a portal between wireless networks and the Internet **190**. However, conventional portals between wireless networks and the Internet generally utilize either a proprietary operating system, or are developed to operate on a single operating system, e.g., WINDOWS NT™ or SOLARIS™. Moreover, conventional gateway **900** architecture provides a communication path between fixed protocol types, e.g., between HTTP protocol messages and SMPP
30 protocol messages. Separate gateway application programming

interfaces (APIs) are developed to communicate with other protocol types. For instance, to allow communications between an application server on the Internet using HTTP protocol messages and a paging terminal using TNPP protocol messages, a new gateway API must be developed from point-to-point from the HTTP interface to the TNPP interface. This presents a tremendous amount of development work necessary to support new network elements, particularly wireless network elements.

There is thus a need for a more flexible gateway architecture and method which provides interface capability without the need for the total redevelopment of separate gateways to support different types of message protocols.

BRIEF DESCRIPTION OF THE DRAWINGS

Features and advantages of the present invention will become apparent to those skilled in the art from the following description with reference to the drawings, in which:

Fig. 1 shows exemplary connectivity for a wireless Internet gateway, in accordance with the principles of the present invention.

Fig. 2 shows an exemplary application programming interface (API) of a wireless Internet gateway including a short message queuing mechanism and abstracted generic destination interface, in accordance with the principles of the present invention.

Fig. 3 shows the inclusion of an SNMP manager in a wireless Internet gateway and direct communication between wireless devices and application servers, in accordance with the principles of the present invention.

Fig. 4 shows exemplary log and configuration files utilized by a wireless Internet gateway, in accordance with the principles of the present invention.

Table 1 shows an exemplary sample gateway configuration file for a wireless Internet gateway, in accordance with the principles of the present invention.

Fig. 5 shows the provisioning capabilities of a wireless Internet gateway via a web page or from a remote wireless device, in accordance with the principles of the present invention.

Fig. 6 shows exemplary wireless Internet gateway support of a simple mail transfer protocol (SMTP) mail server, in accordance with the principles of the present invention.

Fig. 7A shows an exemplary mail send/receipt process flow in the direction from a wireless Internet gateway towards a wireless handset, in accordance with the principles of the present invention.

Fig. 7B shows an exemplary mail send/receipt process flow in the direction from a wireless handset towards a wireless Internet gateway, in accordance with the principles of the present invention.

Fig. 8 shows a redundant configuration for wireless Internet gateways, in accordance with the principles of the present invention.

Figs. 9A to 9C and 10A to 10C show an exemplary software module hierarchy and relationships for a wireless Internet gateway implementing two-way messaging, in accordance with the principles of the present invention.

Fig. 9B illustrates how messages would flow in an SMTP environment.

Fig. 9C illustrates how messages would flow in an RMI scenario.

Fig. 11 shows a conventional gateway providing Internet access to a wireless network through a short message service center (SMSC).

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

The present invention provides a wireless Internet gateway which bridges the gap between the Internet and wireless devices, e.g., via a short message service center (SMSC). The disclosed architecture is modular, and provides a generic destination interface to any of a plurality of destination devices of any of a variety of protocols. This reduces redevelopment efforts to those required only between the generic destination interface and the particular destination device, eliminating the need for redevelopment of the application programming interface (API) up to the generic destination interface.

In a particular disclosed embodiment the wireless Internet gateway provides a portal to SMPP protocol messages using RMI techniques. However, the present invention has applicability to portals or gateways providing a communication path between RMI objects and any other type of wireless network messaging protocol.

The disclosed embodiment of a wireless Internet gateway in accordance with the principles of the present invention receives SMPP messages on a wireless network side, translates those SMPP messages to RMI message objects, and re-transmits those RMI message objects to an application server having access to the Internet (or Intranet) (e.g., to an E-mail server, a chat server, voice messaging system, paging system, etc.). The wireless Internet gateway utilizes common protocols (e.g., SMPP) to allow operation with existing standard conforming wireless networks.

In particular, the disclosed wireless Internet gateway is provided between the Internet using, e.g., HTTP protocols and a Short Message Service Center (SMSC) which communicates with wireless handsets over a wireless network using, e.g., SMPP protocols.

Importantly, the wireless Internet gateway uses Java Remote Method Invocation (RMI) techniques to communicate with

relevant application servers using other transmission protocols of the Internet (or Intranet) (e.g., HTTP, SMTP relating to e-mail messages, etc.). The RMI techniques insert RMI message objects in the wireless Internet gateway, which are communicated to a generic destination interface. From the generic destination interface the messages are packaged into relevant messages of the particular destination protocol (e.g., SMPP), and transmitted to the relevant network element (e.g., to an SMSC).

A wireless Internet gateway in accordance with the principles of the present invention effectively provides a shield for a wireless provider's short message service center (SMSC) from direct interaction with Internet clients. This provides a more secure environment from the perspective of the wireless provider, and allows the wireless provider the freedom to implement Internet access for wireless subscribers using existing otherwise non-Internet ready SMSCs.

The disclosed wireless Internet gateway is flexible in that it is easily developed to support any input protocol (using RMI techniques with a relevant application server providing the particular input protocol), and any output protocol developed to package messages from RMI message objects passed to a generic destination interface into the particular output protocol.

The standard protocol commands utilized by the disclosed wireless Internet gateway can be extended or added to software already existing in an SMSC or other appropriate element of a wireless system through the addition of an appropriate Application Programming Interface (API). Moreover, the wireless Internet gateway can serve as a messaging middleware layer for other applications.

The wireless Internet gateway preferably is implemented so as to be capable of operating on a number of different platforms. One way of accomplishing this is by using software written in the Java

programming language. In this way, any operating system or hardware platform that supports the Java run time environment can be used to support a wireless Internet gateway application. For instance, a wireless Internet gateway application written in Java may be implemented on most
5 operating systems, including Linux, HP-UX, Netware, Solaris (Intel and Sparc), and NT.

An important feature of the present invention is the use of Java Remote Method Invocation (RMI) technology to provide an interface to other application servers, which in turn communicate over the Internet.

10 In this way, application servers on the Internet are responsible for communicating over the Internet using other protocols (e.g., HTTP, SNMP, SMTP, etc.), or directly with a user. These application servers on the Internet each then communicate with a wireless Internet gateway utilizing RMI techniques implemented in an appropriate gateway
15 Application Programming Interface (API). The disclosed gateway API is a collection of Java classes and their methods which use Java Remote Method Invocation (RMI) technology to pass data between an application server in communication with the Internet and the wireless Internet gateway.

20 Thus, in accordance with the principles of the present invention, as long as an application server in communication with the Internet communicates with the wireless Internet gateway using RMI techniques, the application server is free to utilize any other protocol on its front end to communicate over the Internet.

25 Fig. 1 shows exemplary connectivity for a wireless Internet gateway, in accordance with the principles of the present invention.

In particular, as shown in Fig. 1, a wireless Internet gateway
100 together with appropriate application servers 110a, 110b, 110c bridge the gap between an off-the-shelf (OTS) short message service center (SMSC) 120 and the Internet 190.
30

The SMSC **120** communicates with network elements of a wireless network **130**. The SMSC **120** communicates with the wireless Internet gateway **100** using standard SMPP protocol commands.

5 The wireless Internet gateway **100** in turn communicates with the Internet via one or more appropriate application servers **110a**, **110b**, **110c** preferably using a Java Remote Method Invocation (RMI) technique.

The application servers **110a**, **110b**, **110c** may utilize any appropriate front end to communicate with other servers via the Internet
10 **190**. For instance, one application server **110a** may be configured to communicate over the Internet using HTTP protocols. HTTP protocols may be appropriate, e.g., when a wireless device in the wireless network **130** desires to participate in a chat group hosted by a chat server **140** in communication with the Internet **190**. In such a case, the wireless Internet
15 gateway **100** will pass SMPP protocol messages with the SMSC **120**, with utilize RMI techniques with the appropriate application server **110a**, and the application server **110a** will translate the chat group postings into HTTP protocol messages for transmission via the Internet **190** to the chat server **140**.

20 Similarly, another application server may be configured with an appropriate application program to provide an SMTP front end presence on the Internet **190** to the wireless Internet gateway **100**. In this way, wireless devices in the wireless network **130** may send and receive E-mail using SMPP protocol messages from the wireless network **130** to
25 the SMSC **120** and to the wireless Internet gateway **100**, which are passed to the appropriate application server **110b** using RMI techniques, and translated by the application server **110b** to the requisite SMTP protocol messages for transmission over the Internet **190**.

30 Other application servers **110c** may provide other types of front ends in communication with the Internet **190**, e.g., SNMP.

The Internet front end protocol interfaces shown in Fig. 1 as being provided by application servers **110a-110c** may alternatively be integrated into the wireless Internet gateway **100**. For instance, the wireless Internet gateway **100** may include appropriate application programs and interfaces to provide an SMTP interface directly to the Internet **190**, avoiding the need for a separate application server **110** for that purpose.

Similarly, the wireless Internet gateway **100** may include integrated front ends for HTTP and/or SNMP protocol communication links with the Internet **190**. Moreover, the wireless Internet gateway **100** may interface directly with a local chat server **177**.

The wireless Internet gateway **100** may have multiple provisions in its API for relaying data to and from the wireless devices in the wireless network **130** to the application servers **100**. For instance, the wireless Internet gateway **100** may implement a queuing technique that attempts guaranteed delivery to a relevant wireless device through multiple transmissions if necessary. An example of a suitable application for the queuing technique is E-mail.

Fig. 2 shows an exemplary application programming interface (API) of a wireless Internet gateway including a short message queuing mechanism and abstracted generic destination interface, in accordance with the principles of the present invention.

In particular, as shown in Fig. 2, the wireless Internet gateway **100** provides an RMI handler **230** for handling receipt of RMI objects from RMI clients **232** (i.e., application servers **110**). The RMI objects are inserted into a queue handler **200** by the relevant application servers **232**. Using RMI techniques, the particular front end protocol is 'abstracted' away from the wireless Internet gateway **100** API.

In addition to RMI objects, e-mail messages are processed by an SMTP handler **240** as they are received and sent to Email application servers **242**

The queuing technique shown in Fig. 2 captures incoming
5 messages into a message queue **205**. The messages come from either RMI objects from the front end application servers **110**, or as E-mail into a built-in mail server front end function **240** of the wireless Internet gateway **100**. Thus, E-mail messages from appropriate E-mail clients **242** on the Internet **190** are received and processed by an appropriate SMTP handler
10 **240**, and passed on to a queue handler **200**.

In the embodiment shown in Fig. 2, the wireless Internet gateway **100** also includes a direct SMTP connection from a local application server **110d** provided by an SMPP link proxy module **297**. The SMPP link proxy module **297** allows direct insertion and removal of
15 SMPP formatted messages into a SMPP delivery module **260**.

The integrated SMPP link proxy module **297** may communicate with the external application server **110d** using any particular protocol. For instance, the SMPP link proxy module **297** may communicate with the external application server **110d** using RMI
20 techniques. Alternatively, the SMPP link proxy module **297** may communicate with the application server using, e.g., SMPP objects, etc. The application server may be, e.g., another wireless Internet gateway **100**.

The SMPP link proxy module **297** is particularly useful for
25 'listening' to a particular port. A selected port can be monitored, and any/all messages sent to that port can be captured by the SMPP link proxy module **297**, and passed to the local application server **100d** for, e.g., printing, display, transmission via the Internet, etc.

The SMPP link proxy module **297** is optional. As shown, the
30 SMPP link proxy module **297** provides a mechanism for messages from

the wireless network **130** to be passed to a particular application server **110d**, while the queue handler **200** is most efficient in passing messages from application servers **232** or e-mail application servers to a wireless device. However, the queue handler **200** can be implemented to handle
5 messages in both directions to and from mobile devices.

RMI objects inserted into the queue handler **200** by the RMI handler **230** allows for a generic approach to the Internet side of the wireless Internet gateway **100** separate from the particular protocol used (e.g., HTTP), whereas the use of a direct link such as the SMPP link proxy
10 module **297** requires particular development and dedication to a particular protocol, e.g., to SMPP as shown in Fig. 2. While RMI techniques can be utilized for multiple application servers **110** utilizing any of a number of different types of protocols on its front end, the direct technique dictates a protocol-specific implementation.

The queue handler **200** has access to a message cache directory **220**, and to a messages database **210**. When a message arrives its contents are stored in the message cache directory **220**, and details about the message are stored in the messages database **210**.
15

Received messages are stored in the a message queue
20 **205**. The message queue **205** orders the messages in an appropriate fashion, e.g., by their time of arrival.

A queue monitor **250** in communication with the queue handler **200** and the message queue **205** is responsible for removing a message from the message queue **205** and sending the same on to the
25 SMSC **120** via an appropriate SMPP delivery application module **260**.

If the SMSC **120** acknowledges receipt of the message, the message is then removed from the message cache directory **220** and marked as sent in the messages database **210**. If, on the other hand, the SMSC **120** fails to acknowledge the message, the message is copied
30 from the message cache directory **220** and placed back onto the message

queue **205** for a subsequent retransmission at the appropriate time. In this fashion, messages are retransmitted until they are received.

A second exemplary provision of an API in a wireless Internet gateway **100** is the establishment and integration of a direct
5 connection from a wireless Internet gateway to applications such as chat sessions. In particular, the wireless Internet gateway **100** may communicate directly with a chat server using, e.g., RMI techniques.

The wireless Internet gateway **100** is capable of supporting features to give messages certain characteristics and/or to include
10 particular information with a message. For instance, message priority, callback numbers and/or validity times may be included with messages handled by the wireless Internet gateway **100**.

In particular, messages can be given a priority. When a message has a particular priority, the priority is signaled to the SMSC **10**,
15 which in turn will expedite its delivery.

Callback numbers may be inserted with a message by the wireless Internet gateway **100**. Callback numbers provide a service which generally makes it easier for a recipient to respond to a particular received message.

20 The wireless Internet gateway **100** may also mark messages with validity times. A validity time in a message allows a recipient to respond accordingly.

When a response is received from the wireless device, the wireless Internet gateway **100** passes the message directly to the
25 application server **100**. This session occurs through RMI to provide for the addition of new direct communication servers such as chat servers and web page interfaces.

When a short message of any type arrives at the wireless Internet gateway **100**, the short message is examined for its type and

destination. The type and destination of the short message dictate how it is handled.

For instance, if the received short message is an acknowledgement of a short message sent from the wireless Internet gateway **100**, then a receipt acknowledgement of the short message is sent to the source of the short message. As another example, if the received short message is an E-mail destined for transmission over the Internet **190**, then the E-mail message is passed to the relevant mobile E-mail application server (e.g., to the integrated SMTP mail server **300** or to an external SMTP application server **110c**), which in turn sends the E-mail message to a mail relay for ultimate transmission over the Internet **190**.

In a like fashion, each short message received by the wireless Internet gateway **100** from a mobile device is sent to an appropriate (internally integrated or external) application server **110** for processing, e.g., to an HTTP server **110a** for transmission over the Internet **190**, to an SMTP E-mail server **300** for transmission over the Internet **190**, etc.

The queue monitor **250** may communicate directly to the SMPP delivery module **260** utilizing appropriate SMPP protocol messages. However, to further abstract the particular protocol requirements away from the wireless Internet gateway **100**, a generic destination interface **271** may be inserted between the queue monitor **250** (or other message source) and the destination handler.

The generic destination interface **271** provides an interface between the particular protocol on the destination side of the wireless Internet gateway **100** (e.g., SMPP as shown using the SMPP delivery module **260**), and the messages in the message queue **205**. In this way, adaptation to other protocols need change only the support of the generic destination interface **271** with respect to the destination handler (**260-263**).

For instance, the SMPP delivery module **260** may be replaced in the wireless Internet gateway **100** with, e.g., another wireless Internet gateway **261**, an Internet gateway **262**, or a paging terminal **263**. While the SMPP delivery module **260**, the wireless Internet gateway **261**, the Internet gateway **262**, and the paging terminal **263** are all shown together in Fig. 2, this is for convenience of explanation only. The disclosed embodiment relates to the implementation of only one of the destination handlers **260-263** in any one wireless Internet gateway **100**.

Fig. 3 shows the monitoring and control of the status of a wireless Internet gateway **100** in accordance with the principles of the present invention using a Simple Network Management Protocol (SNMP) manager **600**.

In particular, as shown in Fig. 3, SNMP access to the wireless Internet gateway **100** may occur through Management Information Base (MIB) objects. The SNMP access can be considered to occur in three levels of abstraction: the top level 3 is the SNMP management console **600**, the middle layer 2 of abstraction includes the SNMP agent **610**, and the bottom layer 1 of abstraction includes the wireless Internet gateway **100** and inserted RMI objects.

When allowing direct communications between wireless devices and application servers, the relevant application server **110** binds to the wireless Internet gateway **100** and receives messages to and from the wireless device(s). These messages aren't queued but may be directly relayed from the wireless Internet gateway **100** to the SMSC **120** and the wireless device when they are received.

The status of the wireless Internet gateway **100** can be controlled and monitored by the Simple Network Management Protocol (SNMP) manager **600**. For instance, the SNMP management console **600** may initiate a status inquiry. The SNMP agent **610** inserts a query

status RMI object into the wireless Internet gateway **100**, and the relevant status in the wireless Internet gateway **100** is obtained.

The wireless Internet gateway **100** may communicate with the SNMP agent **610** of an appropriate application server **110b** via an RMI interface. The SNMP agent **610** of the application server **110b** in turn communicates to the SNMP Management Console **600**. Using this facility, the wireless Internet gateway **100** may essentially become an SNMP device, and thus can be remotely monitored and managed, e.g., from the SNMP management console **600** or remote scripts and programs.

Using SNMP management, the number of active SMPP links can be seen, the last error examined and other configuration changes made. In this way, the wireless Internet gateway **100** can be remotely reset if necessary or desired.

SNMP access to the wireless Internet gateway **100** may occur using Management Information Base (MIB) objects. Each MIB object defines an item to monitor or control. The MIB's may in turn be translated into Java code using a conventional SNMP development package. The generated Java code gathers an internal value of the wireless Internet gateway **100**, and makes it visible to the SNMP agent **610**. The code generated from an MIB object can also perform actions within the wireless Internet gateway **100** and in so doing, affect the state of the wireless Internet gateway **100** as desired.

The SNMP agent **610** communicates using RMI protocol. Services requiring SNMP access preferably use methods defined by the SNMP agent **610**, which in turn communicates with the SNMP management console **600** using SNMP protocol.

SNMP traps, which reflect error or alert conditions in the wireless Internet gateway **100**, go through the SNMP agent **610** for

display on the SNMP management console **600**. Remote processes and scripts may also monitor these traps.

Scripts and separate processes can talk SNMP remotely with the wireless Internet gateway **100**. The code generated from the MIB's provides the interface to do this. This allows other monitoring processes to watch the wireless Internet gateway **100** and, for example, send notifications to an administrator if any problems occur. They send commands and configuration information as necessary also.

Fig. 4 shows exemplary log and configuration files utilized by a wireless Internet gateway, in accordance with the principles of the present invention.

In particular, as shown in Fig. 4, the wireless Internet gateway **100** may maintain message logs of its activity for local or remote monitoring. For instance, plain-text files may be made available to be accessed and viewed. As an example of a plain-text file, a message log may be accessed with a text viewer **800**, e.g., a web page server using a LogView Java servlet running on the host machine implementing the API of the wireless Internet gateway **100**.

There are several files to which the text viewer **800** may provide access (e.g., read-only access). As shown in Fig. 4, they may comprise a systems log **810**, an accounting log **830**, a STDOUT log **850**, and a STDERR log **820**.

The text viewer **800** can also show a configuration file **840** for the wireless Internet gateway **100**. The systems log file **810** may contain messages describing the operation of the wireless Internet gateway **100**.

Messages typically have a severity level associated with them, e.g., a severity level 1 indicating a serious error and severity levels 2 through 9 being of decreasing severity. The text viewer **800** preferably filters and/or presents the messages based on their severity level.

The accounting log file **830** may contain a list of the messages sent through the wireless Internet gateway **100**.

The STDERR log **820** and STDOUT log files **850** may contain messages from the API software of the wireless Internet gateway **100**, and may be used by the administrator of the wireless Internet gateway **100** to determine if any program errors have occurred.

The wireless Internet gateway **100** can be statically configured at initialization time via the gateway configuration file **840**.

Table 1 shows an exemplary sample gateway configuration file **840** for a wireless Internet gateway **100**, in accordance with the principles of the present invention.

The gateway configuration file **840** may set such parameters as, e.g., the maximum message length, message transmission timeout, host names, and/or wireless device access number ranges. The gateway configuration file **840** may be a plain-text file which is created/modified with a standard text editor. The gateway configuration file **840** may contain configuration parameters in a tagged data format. Tagged data format is a descriptive term describing the configuration item and the item's value.

One parameter that may be configured in the gateway configuration file **840** is a spam filter. Spam is unsolicited and unwelcome E-mail. By reading the spam configuration values as defined by appropriate spam parameters, the wireless Internet gateway **100** can prevent too many messages from the same sender going to a particular recipient. Also, the wireless Internet gateway **100** can prevent one sender from sending an excessive number of messages via the wireless Internet gateway **100**.

The wireless Internet gateway **100** may keep track of the number of messages a sender has sent and/or how many messages a particular recipient has received.

If the configuration values are exceeded, a message may be sent to the systems log **810**. This provides, among other things, the ability for a wireless carrier to base a subscriber rate based on their own specifically monitored use of the Internet (e.g., on a number of messages sent and/or received via a wireless Internet gateway **100**).

Support for internationalization may be included in the wireless Internet gateway **100**. For instance, responses to users can be configured to reflect the language in the local region where the wireless Internet gateway **100** has been deployed. Internationalization may be implemented using Java property files and its internationalization APIs.

As an example, to provide internationalization, the gateway configuration file **840** might contain the following two lines:

LocaleLanguage	es	# ISO 639 language code
LocaleCountry	AR	# ISO 3177 country code

This demonstrates how an administrator may specify which language and/or in which country the wireless Internet gateway **100** will operate. If the locale parameters are not present in the gateway configuration file **840**, the language and country may default, e.g., to English (en) and the United States (US), respectively.

The property files may include a corresponding es_AR string in the file name. For example, the SMPP.properties file (which implies en_US) may contain a number of possible error messages, e.g.:

ERROR / STATUS CODE DESCRIPTIONS

ErrorCode0=Message accepted
ErrorCode1=Message too long
ErrorCode2=Internal Error: SMPP Command too long
ErrorCode3=Internal Error: Invalid SMPP Command ID

The SMPP_es_AR.properties file may include the following corresponding lines:

ERROR / STATUS CODE DESCRIPTIONS

- 5 ErrorCode0=Mensaje aceptado
- ErrorCode1=Su mensaje es demasiado largo
- ErrorCode2=Longitud de comando no válida
- ErrorCode3=Identificación de comando no válida

10 User parameters may be restricted. For instance, to control which parameters a customer can configure, the wireless Internet gateway **100** may work with an encrypted license. The license may encapsulate a variety of parameters associated with a customer's license agreement.

15 In particular, a third-party license generator may create a customer license in the form of an encrypted file containing all pertinent license information. This may be accomplished by running the license generator and providing it with the allowed configuration. An encrypted license file, e.g., smscgw.lic, may be deployed with the wireless Internet gateway **100**. Thus, when the wireless Internet gateway **100** is started, it reads the license file and as it performs its functions, it may query the license properties and behave accordingly.

25 Fig. 5 shows the provisioning capabilities of a wireless Internet gateway **100** via a web page or from a remote wireless device using an external SMPP(P) application server **1000**, in accordance with the principles of the present invention.

30 In particular, as shown in Fig. 5, SMPP Provisioning Protocol, also known as the SMPP(P) protocol, allows for the creation, modification and deletion of subscribers, paging subscribers and distribution lists within the SMSC **120**. The wireless Internet gateway **100**

may have provisioning capabilities provided via a web page on an appropriate PC or other computer device operating a web browser **1030**. The web browser **1030** utilizes HTTP protocol messages to an appropriate HTTP server **110a**, which in turn communicates with the
5 SMPP(P) application server **1000**, e.g., via the Internet **190** or an Intranet.

Alternatively, provisioning for the wireless Internet gateway **100** may be provided from a remote wireless device such as a Wireless Access Protocol (WAP) phone **1020**.

SMPP may be implemented as another application server
10 **110** using the RMI protocol as shown in Fig. 5 (or internally as shown in Fig. 2). In any case, the wireless Internet gateway **100** handles transmission and receipt of SMPP(P) messages with the SMSC **120**.

The wireless Internet gateway **100** may include one or more integrated communication interfaces, e.g., simple mail transfer protocol
15 (SMTP).

Fig. 6 shows exemplary wireless Internet gateway support of a simple mail transfer protocol (SMTP) mail server, in accordance with the principles of the present invention.

In particular, as shown in Fig. 6, a wireless Internet gateway
20 **100** including SMTP support includes an integrated SMTP mail server **300** connected to the Internet **190**. E-mail is passed between the integrated SMTP mail server **300** and the SMPP application programming interface **260** of the wireless Internet gateway **100**.

The SMTP mail server **300** shown in Fig. 7 may insert
25 messages into the message queue **205** shown in Fig. 2 directly, without the need to utilize RMI techniques. However, the wireless Internet gateway **100** may alternatively or additionally communicate using RMI techniques with a particular application server **100c** which provides e-mail services.

The integration of the SMTP mail server **300** into a wireless Internet gateway **100** allows mail from standard E-mail clients **242** to be sent to the wireless Internet gateway **100** and ultimately on to wireless devices serviced by the SMSC **120** in communication with the wireless Internet gateway **100**. The SMTP mail server **300** translates messages between SMTP protocol messages between the wireless Internet gateway **100** and the Internet **190**, and SMPP protocol messages between the wireless Internet gateway **100** and the SMSC **120**.

The SMTP mail server **300** may be part of the software constituting the application programming interface (API) of the wireless Internet gateway **100**, and preferably otherwise operates as a standard mail server.

In operation, the disclosed SMTP mail server **300** of the wireless Internet gateway **100** monitors a mail port defined by a configuration file for the wireless Internet gateway **100**, and answers mail requests sent from E-mail clients **242**. When an E-mail client **242** sends an E-mail message to a wireless device serviced by the SMSC **120**, the wireless Internet gateway **100** receives and queues the E-mail message. Then, the wireless Internet gateway **100** sends the E-mail message to the relevant SMSC **120** using SMPP protocol for transmission to the relevant wireless handset in the wireless network **130**.

The API of the wireless Internet gateway **100** may also ensure that an E-mail message is truncated if necessary, e.g., if the E-mail message is longer than the currently configured maximum message length. In addition, or alternatively, the API of the wireless Internet gateway **100** may be configured to break long E-mail messages up into several separate transmissions for transmission to the SMSC **120** and on to the relevant wireless handset in the wireless network **130**.

A user of a mobile device in a wireless network **130** including a wireless Internet gateway **100** in accordance with the

principles of the present invention may initiate an E-mail message from their mobile device, and may receive a receipt therefore indicating that the destination has received and/or reviewed the E-mail message. In such a case, the wireless Internet gateway **100** will send the mobile originated E-mail message to an appropriate E-mail server **110c** using RMI (if external to the wireless Internet gateway **100**), and that E-mail server **110c** will accomplish delivery of the E-mail message.

In the disclosed embodiment, communications between wireless devices and the SMSC **120** of a wireless network **130** and the wireless Internet gateway **100** utilize messages conforming to standard SMPP v3.3 protocols for mobile terminated (MT) communications, with the following exceptions in the case of mobile originated (MO) communications:

1. The registered_delivery flag is utilized.
2. A "\$R" trigger exists in every message body indicating a source-unique tracking number.
3. User responses are contained within the stat component of the standard delivery receipt.
4. Message types are identified by the esm_class field.

Alpha-numeric E-mail may be embedded in the source_addr field for a short message. In particular, E-mail addresses can be embedded in source_addr field for submit_sm messages, and in the destination_addr for deliver_sm messages. Such embedding provides an indication as to where the particular E-mail comes from, and where it should go. The conventional 20 character (or other length) limitation may be extended as necessary or desired for these particular fields.

Figs. 8A and 8B show exemplary scenarios describing interaction between a mobile device, its SMSC **120**, and a wireless Internet gateway **100** as an SMPP client, in accordance with the principles

of the present invention. In these exemplary scenarios, an E-mail message is communicated.

Certain aspects of communications between mobile devices and the wireless Internet gateway are shown and described in co-owned
5 U.S. Appl. No. 60/____,____, filed _____ by Richard A. Smith and Johanna Wilson, entitled "Short Messaging Service Center SMPP to HTTP Internet Communications", the entirety of which is expressly incorporated herein by reference.

Fig. 7A shows an exemplary message flow when a wireless
10 Internet gateway **100** originates a short message requiring SME delivery acknowledgement and a response from the recipient, in accordance with the principles of the present invention.

In particular, as shown in Fig. 7A, a wireless Internet gateway **100** sends a message to a mobile wireless handset device, and
15 requests two types of delivery feedback: (1) acknowledgement of when the user reads the message; and (2) a response code from the user.

The message is derived from an E-mail message received from the Internet to an address, e.g., "MIN@[gateway]". The wireless Internet gateway **100** supplies the sender's E-mail address so that it may
20 be processed by the mobile wireless handset device.

Note that in the preferred embodiment, the wireless Internet gateway **100** will not request delivery feedback of any kind when submitting short messages for incoming E-mail.

In step 1 of Fig. 7A, the wireless Internet gateway generates
25 a SUBMIT_SM message with key elements populated in the following way:

- service_type: page
- source_addr: [sender's E-mail address]
- destination_addr: handset's MIN
- 30 - registered_delivery_flag: 12 (bits 2&3 enabled)

- short_message: \$R[13-bit gateway id]\$M[E-mail body]

If the registered_delivery_flag is 0 or 1, then the \$R value is not required.

5 In step 2 of Fig. 7A, the SMSC sends a standard submit_sm_response message. The response is matched to the submit_sm by sequence number. The body contains the SMSC-generated tracking number.

 In step 3 of Fig. 7A, the SMSC delivers the message to the mobile device in compliance with 637A.

10 In step 4 of Fig. 7A, the user of the mobile device reads the message. A Delivery Ack is sent by the mobile device through the network to the SMSC.

 In step 5 of Fig. 7A, the SMSC generates a Deliver_SM message to the wireless Internet gateway using a Delivery Receipt
15 template. The "stat" portion of the delivery receipt may use identical values as the normal SMSC Delivery Receipt. In the given example, the value for the esm_class is 8 (bit 3 enabled).

 The "text" portion of the delivery receipt will also include the \$R trigger prior to any text, thus indicating the MO tracking number. This
20 tracking number will be the same that was assigned by the original submit_sm in step 1. A \$M trigger following the \$R value contains the first 20 characters of the original short message.

 As an example, the "text" portion may contain "\$R9998\$MThis was a MO test".

25 In step 6 of Fig. 7A, the user of the mobile device responds to the received short message with a keypress or other action which results in the generation of, e.g., a value of "3".

 In step 7 of Fig. 7A, the SMSC generates a Deliver_SM message to the wireless Internet gateway again using the Delivery
30 Receipt template. In the given example, the "stat" portion of the message

contains the response code. e.g., "3". The esm_class value is "16" (bit 4 enabled).

As with step 5, the "text" portion of the delivery receipt is in the format \$R[ref #]\$M[message text]

5 The delivery feedback may be dependent on the registered_delivery_flag value. For example, a value of 8 (bit 3 enabled) may cause only the User Response code to have been returned.

Fig. 7B shows a mobile device originating a message requiring SME delivery acknowledgement and a user response as it
10 interacts with a wireless Internet gateway, in accordance with the principles of the present invention.

In particular, as shown in Fig. 7B, a mobile device originates a message to the wireless Internet gateway, requesting both delivery receipt and a response code from the recipient. The short message could
15 be submitted to an E-mail address and the mobile device can request a delivery receipt to ensure that the short message was delivered successfully.

If desired, User Response codes need not be supported for mobile originated E-mails.

20 In step 1 of Fig. 7B, the mobile device generates a mobile originated short message addressed to a particular E-mail address.

In step 2 of Fig. 7B, the SMSC parses the destination address, determines that it is formatted like an E-mail address, and forwards it to the wireless Internet gateway over the SMPP (rx)
25 connection.

A Deliver_SM message is generated with the following key field values:

- service_type: page
- source_addr: [handset's MIN]
- 30 - destination_addr: [destination E-mail address]

- registered_delivery_flag: 12 (bits 2&3 enabled)
- short_message: \$R[new ref id]\$M[message]

The [new ref id] may be generated by the mobile device and forwarded by the SMSC through the \$R trigger.

5 In step 3 of Fig. 7B the wireless Internet gateway generates a deliver_sm_resp code. This contains the internal tracking number of the wireless Internet gateway within the message body. The sequence number matches that of the Deliver_SM.

10 In step 4 of Fig. 7B, the wireless Internet gateway has 'read' the short message, and generates a delivery receipt to the SMSC. For example, it would generate a delivery receipt showing the result of an attempt to forward the E-mail message.

15 The delivery receipt may be formatted as shown and described with respect to step 5 in Fig. 7A. In particular, the "stat" field contains the status code and the "text" field contains the \$R[ref id]\$M[message] content. The Reference ID value is the same as received from the deliver_sm in step 2 of Fig. 7B. The esm_class is 8.

In step 5 of Fig. 7B, the delivery message is forwarded to the mobile device.

20 In step 6 of Fig. 7B, if the wireless Internet gateway were to provide a response code, it would generate a delivery receipt with the response code within the "stat" element and the esm_class = 16. This would be passed through a submit_sm message to the SMSC. Of course, delivery receipt need not be implemented in any particular application.

25 In step 7 of Fig. 7B, the SMSC will forward the response code to the mobile device.

Fig. 8 shows a redundant configuration for wireless Internet gateways 100, in accordance with the principles of the present invention.

30 In particular, as shown in Fig. 8, a wireless Internet gateway 100 in accordance with the principles of the present invention can be

configured to run redundantly on separate hardware platforms. In this environment, separate wireless Internet gateway servers **10**, **20** can be configured to share the workload of client processing and/or serve as hot-standby servers.

5 A first wireless Internet gateway **10** provides communication between an SMSC **120** and the Internet **190**. Similarly, a second wireless Internet gateway **20** provides communication between the SMSC **120** and the Internet **190**. A network redirector device **1120** evenly distributes incoming traffic between the first wireless Internet gateway **10** and the
10 second wireless Internet gateway **20**.

Each of the first and second wireless Internet gateways **10**, **20** are given access to separate databases **1110**, **1112** in which they each maintain information about their respective messages. The first wireless Internet gateway **10** can be designated as the primary device,
15 with the corresponding database **1110** designated as the primary database. The second wireless Internet gateway **20** and corresponding database **1112** can be designated as secondary devices.

As messages are processed on one wireless Internet gateway **10**, **20**, appropriate database software may synchronize
20 information with the other database(s).

Upon failure of a primary wireless Internet gateway **10**, the network redirector **1120** transparently routes the failed wireless Internet gateway's traffic to the remaining wireless Internet gateway(s) **20**. In this way, any pending messages from the failed wireless Internet gateway **10**
25 will not be lost because they will have been sent not only to the database **1110** corresponding to the failed wireless Internet gateway **10**, but also to the other database(s) **1112** corresponding to the secondary, backup wireless Internet gateway(s) **20**.

Redundant architecture such as that shown in Fig. 8
30 includes primary wireless Internet gateway databases **1110**, and

secondary wireless Internet gateway databases **1112** maintaining information about short messages.

The first and second wireless Internet gateways **10, 20** may ordinarily share the load imposed upon them. However, if one wireless Internet gateway **10, 20** should fail, its messages may be automatically redirected by the network redirector **1120** and then handled by one of the redundant wireless Internet gateways **20**.

The wireless Internet gateway **100** provides an abstracted mechanism for sending mobile terminated (MT) messages, where the MT delivery protocol is encapsulated from other GW software components. Using the generic destination interface **271**, two-way messaging may be implemented to support any relevant protocol, e.g., SMPP, Reflex, SNPP, SMTP, and other protocols.

Two-way messaging may be enabled and disabled in the same way that the RemoteSMPP and other pieces are controlled. The configuration file **840** may define whether or not two-way messaging is enabled, and/or an encrypted license file may also include permission to enable two-way messaging.

Figs. 9A to 9C and 10A to 10C show an exemplary software module hierarchy and relationships for a wireless Internet gateway **100** implementing two-way messaging, in accordance with the principles of the present invention.

In particular, the exemplary two-way messaging software package hierarchy may be implemented, e.g., with a number of key components:

TwoWayMessage **708**, which is an independent Message class for 2-way communication.

lmessageReceiver **706**, which classifies objects able to receive TwoWayMessages.

ImessageSender **704**, which classifies objects able to send TwoWayMessages.

Registrar **702**, which facilitates connecting receivers and senders.

5 A Config class **712** may be configured to interact with the Registrar **702** at runtime in order to dynamically assign sender/receiver relationships. A sender can have any number of receivers.

Sub-packages define particular aspects of the 2-way capabilities. For example, an 'smtp' sub-package **720** defines a Sender and Receiver that know how to send and receive SMTP 2Way Messages. The TwoWayMessage class **708** is abstract; subclasses provide details specific to particular protocols being used. This allows the handlers to set and retrieve protocol-specific parameters, while still allowing the messages to be treated in a generic manner.

15 A 'remote' package **722** provides a mechanism for remote RMI objects to register as 2-way message receivers and senders. This approach is akin to the RemoteSMPP module, where external apps can register as SMPP listeners as well as originate SMPP messages into the wireless Internet gateway. However, this approach is preferable because
20 it is not tied to a particular protocol.

Protocol handlers within the wireless Internet gateway **100**, such as the SMTP handler 240 (Fig. 2) and the SMPP Delivery module **260** will interact with the two-way software modules. Thus, if a generic two-way feature is enabled in the config file **840**, then the SMTP and
25 SMPP listeners will also forward (select) traffic through the two-way module to be delivered to potential listeners.

The API software of the wireless Internet gateway **100** preferably allows objects both within and external to the wireless Internet gateway **100** to receive and send messages in a protocol independent
30 manner.

Integrating listeners and senders can be simplified and configurable at runtime through the use of the configuration file **840**. This is especially true of external applications that wish to register a listeners for particular message senders.

5 The wireless Internet gateway **100** preferably gracefully handles 'disconnected' Remote applications. If an external application is stopped or re-started, the wireless Internet gateway **100** preferably logs an error and cleans up all internal references occupied by the remote application.

10 Using two-way messaging, a Mobile Terminated Receiver object may be made available in the wireless Internet gateway **100** by which messages can be delivered into the message queue **205**.

Fig. 9B illustrates how messages would flow in an SMTP environment.

15 In particular, as shown in Fig. 9B, a 2WaySMTPListenerAgent **730** implements an IMessageSender interface **704**. It is therefore able to send messages to whatever IMessageReceivers **706** might want to register with it. The 2WaySMTPListenerAgent **730** would be optionally created by a
20 tcs.ain.msggw.SMTPSession class. Whenever SMTP messages are sent to a particular address, they are sent to the 2WaySMTPListenerAgent **730** rather than delivered into the message queue **205**.

25 The 2WaySMTPListenerAgent **730** then forwards the message (step 2.1) to each IMessageReceiver object **706** that had registered with it through the addReceiver() function in step 1.1. When the 2WaySMTPListenerAgent **730** tells the receiver to process the message, it includes three parameters: itself (the Sender), a "Return Path" IMessageReceiver object **706** through which responses can be made, and finally the message itself.

In this example, the message is sent to 'App' **733**, which implements both the sender and receiver interfaces. After App **733** receives and processes the message, it will want to send a response back. Responses must be returned to the 'return path' IMessageReceiver object **706** that was provided when the message was received. Since App **733** is also a sender, it can directly send the response message to the return path receiver.

In this case, the SMTPDeliveryAgent **735** is the receiver that had been specified. The message is received by the SMTPDeliveryAgent **735** (step 3), and then forwarded back to the user.

Fig. 9C illustrates how messages would flow in an RMI scenario.

In particular, RMI is a bit more complicated, but similar in nature. As shown in Fig. 9C, a Remote2Way object **740** brokers the 'inside' and 'outside' worlds. It ensures that references are cleaned up if the remote client should disconnect or fail. It also helps ensure that the core classes do not worry about RMI details at all. For every remote object that binds through the Remote2Way **740**, a local 'proxy' object is created which actually binds to the specified senders and relays messages back and forth through the Remote2Way **740**.

As indicated previously, the Registrar **702** is used to facilitate connecting receivers to senders. This can be done by explicitly passing in sender and receiver objects to the registrar **702**. However, one can also assign unique identifies to senders and receivers, and then reference either by their ID rather than by the actual object. This latter approach is useful for objects that need to be connected at runtime, as defined by a configuration file **840**.

In the above scenario, the Config object **712** assigns an ID to a sender object. A remote app **741** then binds to the wireless Internet gateway's Remote2Way interface **740** and requests to be a listener for the

sender with the same given ID. Remote2Way **740** creates a ProxyReceiver **742** for the remote object, and then uses the Registrar **702** to register the proxyReceiver **742** as a listener to the Sender with the specified ID.

5 When the Sender sends a message, it will be delivered to the proxyReceiver **742**, which forwards it to Remote2Way **740**, which then goes to the remote object **741**. The remote object **741** can then reply with a message, which will be sent via Remote2Way **740** to the ProxyReceiver **742**, which will ensure that it gets delivered to the ReturnPath Receiver
10 that was originally specified when the Sender sent the message.

Remote2Way **740** also provides methods for originating new messages directly to senders. So, the remote app **741** can do more than just reply.

15 A wireless Internet gateway **100** in accordance with the principles of the present invention is particularly useful for wireless carriers and/or Internet service providers (ISPs). For instance, a wireless Internet gateway **100** can also be used within the Enterprise and ISP markets to provide a single point of entry for short message system (SMS) delivery to multiple wireless carriers. This is detailed in a co-owned U.S. Appl. No.
20 60/_____, filed _____ by Richard Smith, and entitled "Web Gateway Multi-Carrier Support", which in its entirety is explicitly incorporated herein by reference.

25 While the invention has been described with reference to the exemplary embodiments thereof, those skilled in the art will be able to make various modifications to the described embodiments of the invention without departing from the true spirit and scope of the invention.

CLAIMS

What is claimed is:

1. A wireless Internet gateway, comprising:
5 a Java Remote Method Invocation (RMI) handler;
a destination handler; and
a message handler between said RMI handler and said destination handler;
wherein RMI objects are inserted in said message handler
10 by an application server in communication with said RMI handler.
2. The wireless Internet gateway according to claim 1,
wherein:
said destination handler utilizes SMPP protocols.
15
3. The wireless Internet gateway according to claim 1,
wherein:
said destination handler utilizes HTTP protocols.
- 20 4. The wireless Internet gateway according to claim 1,
wherein:
said destination handler utilizes TNPP protocols.
5. The wireless Internet gateway according to claim 1,
25 further comprising:
an SMPP link proxy module providing direct communication
between an application server and said destination handler.

6. The wireless Internet gateway according to claim 1,
further comprising:

a message queue;

wherein messages contained in RMI objects in said
5 message handler are queued for transmission to a destination in said
message queue.

7. The wireless Internet gateway according to claim 1,
further comprising:

10 a generic destination interface between said message
queue and said destination handler.

8. The wireless Internet gateway according to claim 1,
further comprising:

15 a chat server in communication with said RMI handler.

9. The wireless Internet gateway according to claim 1,
further comprising:

20 an e-mail server in communication with said RMI handler.

10. The wireless Internet gateway according to claim 1,
further comprising:

an SMTP handler in communication with said handler.

25

11. A wireless Internet gateway, comprising:
a Java Remote Method Invocation (RMI) handler;
an SMPP delivery handler; and
a message handler between said RMI handler and said

5 SMPP delivery handler;

wherein RMI objects are inserted in said message handler
by an application server in communication with said RMI handler, directed
to said SMPP delivery handler for delivery to a wireless device using
SMPP protocols.

10

12. A method of providing communications between a
wireless network and the Internet, comprising:

accepting an RMI object from an application server in
communication with the Internet;

15

extracting a short message from said RMI object; and
passing said short message to a destination handler for
transmission to said wireless network.

13. The method of providing communications between a
20 wireless network and the Internet according to claim 12, further
comprising:

monitoring short messages relating to a particular
destination subscriber for billing purposes based on a number of short
messages communicated with said destination subscriber.

25

14. The method of providing communications between a wireless network and the Internet according to claim 13, wherein said step of passing comprises:

- passing said short message to a generic protocol destination interface; and
- passing said short message from said generic protocol destination to said destination handler.

15. The method of providing communications between a wireless network and the Internet according to claim 13, further comprising:

- adding a parameter to said short message in a wireless Internet gateway.

16. The method of providing communications between a wireless network and the Internet according to claim 13, wherein said added parameter comprises:

- a message priority level.

17. The method of providing communications between a wireless network and the Internet according to claim 13, wherein said added parameter comprises:

- a callback number.

18. The method of providing communications between a wireless network and the Internet according to claim 13, wherein said added parameter comprises:

- a validity time.

19. The method of providing communications between a wireless network and the Internet according to claim 13, wherein said added parameter comprises:

a delivery receipt request.

5

20. The method of providing communications between a wireless network and the Internet according to claim 13, further comprising:

logging details about said short message in a messages
10 database.

21. The method of providing communications between a wireless network and the Internet according to claim 13, further comprising:

15 storing contents of said short message in a message cache.

22. Apparatus for providing communications between a wireless network and the Internet, comprising:

means for accepting an RMI object from an application
20 server in communication with the Internet;

means for extracting a short message from said RMI object;
and

means for passing said short message to a destination handler for transmission to said wireless network.

25

23. The apparatus for providing communications between a wireless network and the Internet according to claim 22, wherein said means for passing comprises:

means for passing said short message to a generic protocol destination interface; and

means for passing said short message from said generic protocol destination to said destination handler.

24. The apparatus for providing communications between a wireless network and the Internet according to claim 22, further comprising:

means for logging details about said short message in a messages database.

25. The apparatus for providing communications between a wireless network and the Internet according to claim 22, further comprising:

means for storing contents of said short message in a message cache.

26. The apparatus for providing communications between a wireless network and the Internet according to claim 22, further comprising:

means for receiving an e-mail message from an SMTP handler; and

means for passing said e-mail message to said destination handler for transmission to said wireless network.

27. The apparatus for providing communications between a wireless network and the Internet according to claim 22, further comprising:

means for adding a parameter to said short message in a wireless Internet gateway.

28. The apparatus for providing communications between a wireless network and the Internet according to claim 22, wherein said means for adding a parameter adds at least one of:

a message priority level;
a callback number;
a validity time; and
a delivery receipt request.

29. A method of providing an encrypted license to a system user, comprising:

establishing at least one adjustable parameter having a maximum range for said system;
encrypting a license file with an enablement of said adjustable parameter; and
limiting a range of said adjustable parameter using said encrypted license file, within said maximum range based on a level of use granted to said system user.

30. The method of providing an encrypted license to a system user according to claim 29, wherein:

said system is a wireless Internet gateway.

31. Apparatus for providing an encrypted license to a system user, comprising:

means for establishing at least one adjustable parameter having a maximum range for said system;

5 means for encrypting a license file with an enablement of said adjustable parameter; and

means for limiting a range of said adjustable parameter using said encrypted license file, within said maximum range based on a level of use granted to said system user.

10

32. The apparatus for providing an encrypted license to a system user according to claim 31, wherein:

said system is a wireless Internet gateway.

15

ABSTRACT

A wireless Internet gateway which bridges the gap between the Internet and wireless devices, e.g., via a short message service center (SMSC). The disclosed wireless Internet gateway provides a portal to SMPP, HTTP, TNPP, or other protocol messages using Java Remote Method Invocation (RMI) techniques. Application servers (e.g., in communication with the Internet or an Intranet) insert RMI objects containing messages in a message queue handler of the wireless Internet gateway. The RMI objects are queued and passed either directly to a destination delivery handler (e.g., SMPP, SMTP, HTTP or TNPP protocol handler), or passed through a generic destination interface to provide an additional layer of abstraction to simplify development of the support of other destination protocols. An SMTP handler may be integrated into the wireless Internet gateway to provide direct communication of SMTP protocol messages (i.e., e-mail) to the message queue. An SMPP link proxy module may be implemented to provide direct access between a local application server and the destination delivery handler. The SMPP link proxy module is particularly useful in the direction from the wireless network to the application server. From the generic destination interface the messages are packaged into relevant messages of the particular destination protocol (e.g., SMPP), and transmitted to the relevant network element (e.g., to an SMSC). The disclosed wireless Internet gateway is flexible in that it is easily developed to support any input protocol (using RMI techniques with a relevant application server providing the particular input protocol), and any output protocol developed to package messages from RMI message objects passed to a generic destination interface into the particular output protocol.

2000-2001		2001-2002		2002-2003		2003-2004		2004-2005		2005-2006		2006-2007		2007-2008		2008-2009		2009-2010		2010-2011		2011-2012		2012-2013		2013-2014		2014-2015		2015-2016		2016-2017		2017-2018		2018-2019		2019-2020		2020-2021		2021-2022		2022-2023		2023-2024		2024-2025		2025-2026		2026-2027		2027-2028		2028-2029		2029-2030		2030-2031		2031-2032		2032-2033		2033-2034		2034-2035		2035-2036		2036-2037		2037-2038		2038-2039		2039-2040		2040-2041		2041-2042		2042-2043		2043-2044		2044-2045		2045-2046		2046-2047		2047-2048		2048-2049		2049-2050		2050-2051		2051-2052		2052-2053		2053-2054		2054-2055		2055-2056		2056-2057		2057-2058		2058-2059		2059-2060		2060-2061		2061-2062		2062-2063		2063-2064		2064-2065		2065-2066		2066-2067		2067-2068		2068-2069		2069-2070		2070-2071		2071-2072		2072-2073		2073-2074		2074-2075		2075-2076		2076-2077		2077-2078		2078-2079		2079-2080		2080-2081		2081-2082		2082-2083		2083-2084		2084-2085		2085-2086		2086-2087		2087-2088		2088-2089		2089-2090		2090-2091		2091-2092		2092-2093		2093-2094		2094-2095		2095-2096		2096-2097		2097-2098		2098-2099		2099-2100		2100-2101		2101-2102		2102-2103		2103-2104		2104-2105		2105-2106		2106-2107		2107-2108		2108-2109		2109-2110		2110-2111		2111-2112		2112-2113		2113-2114		2114-2115		2115-2116		2116-2117		2117-2118		2118-2119		2119-2120		2120-2121		2121-2122		2122-2123		2123-2124		2124-2125		2125-2126		2126-2127		2127-2128		2128-2129		2129-2130		2130-2131		2131-2132		2132-2133		2133-2134		2134-2135		2135-2136		2136-2137		2137-2138		2138-2139		2139-2140		2140-2141		2141-2142		2142-2143		2143-2144		2144-2145		2145-2146		2146-2147		2147-2148		2148-2149		2149-2150		2150-2151		2151-2152		2152-2153		2153-2154		2154-2155		2155-2156		2156-2157		2157-2158		2158-2159		2159-2160		2160-2161		2161-2162		2162-2163		2163-2164		2164-2165		2165-2166		2166-2167		2167-2168		2168-2169		2169-2170		2170-2171		2171-2172		2172-2173		2173-2174		2174-2175		2175-2176		2176-2177		2177-2178		2178-2179		2179-2180		2180-2181		2181-2182		2182-2183		2183-2184		2184-2185		2185-2186		2186-2187		2187-2188		2188-2189		2189-2190		2190-2191		2191-2192		2192-2193		2193-2194		2194-2195		2195-2196		2196-2197		2197-2198		2198-2199		2199-2200		2200-2201		2201-2202		2202-2203		2203-2204		2204-2205		2205-2206		2206-2207		2207-2208		2208-2209		2209-2210		2210-2211		2211-2212		2212-2213		2213-2214		2214-2215		2215-2216		2216-2217		2217-2218		2218-2219		2219-2220		2220-2221		2221-2222		2222-2223		2223-2224		2224-2225		2225-2226		2226-2227	
-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--

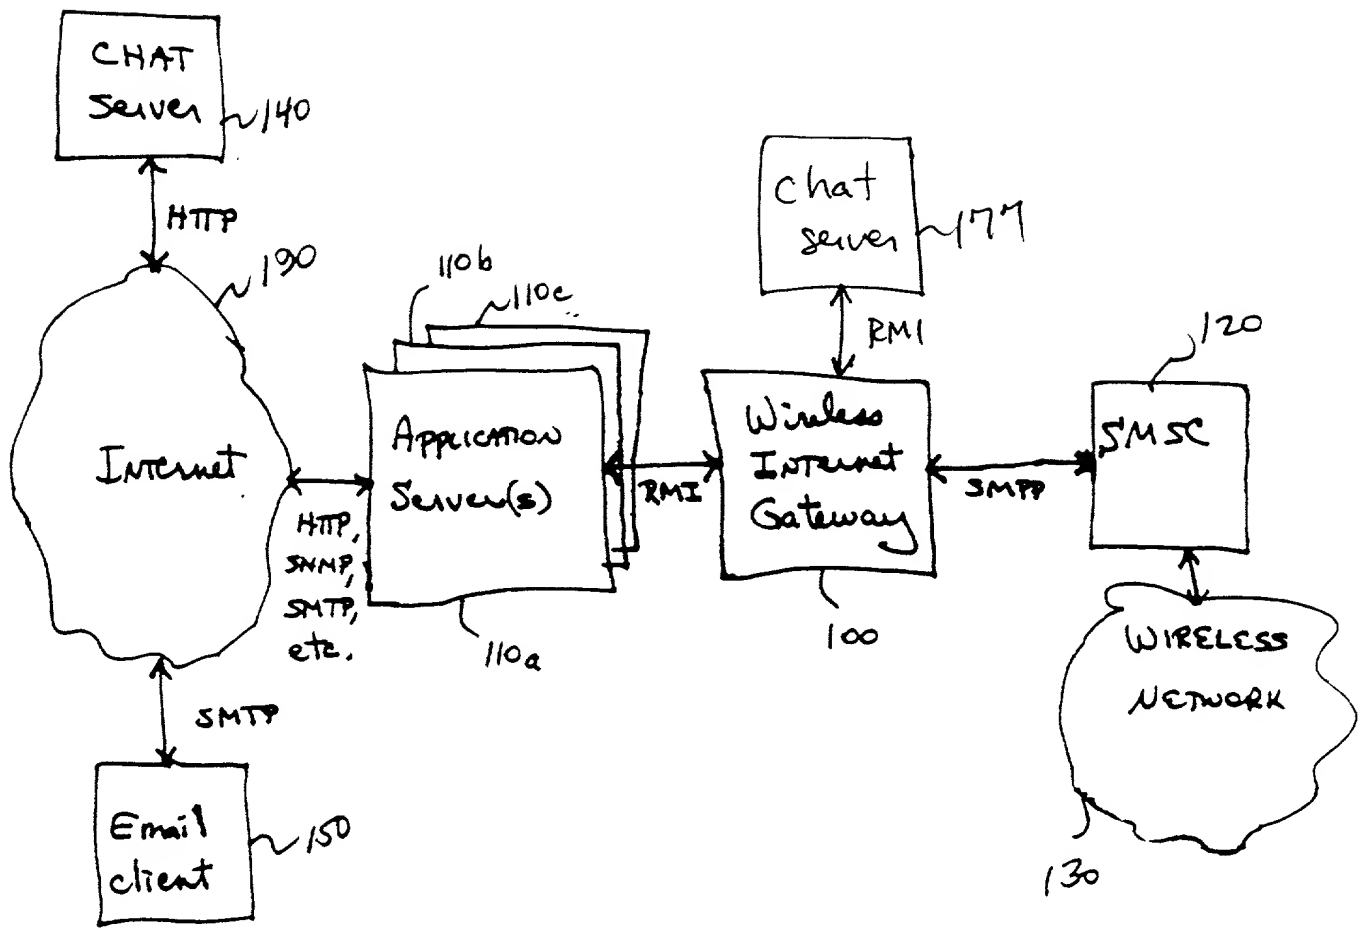


FIG. 1

002030" 23202960

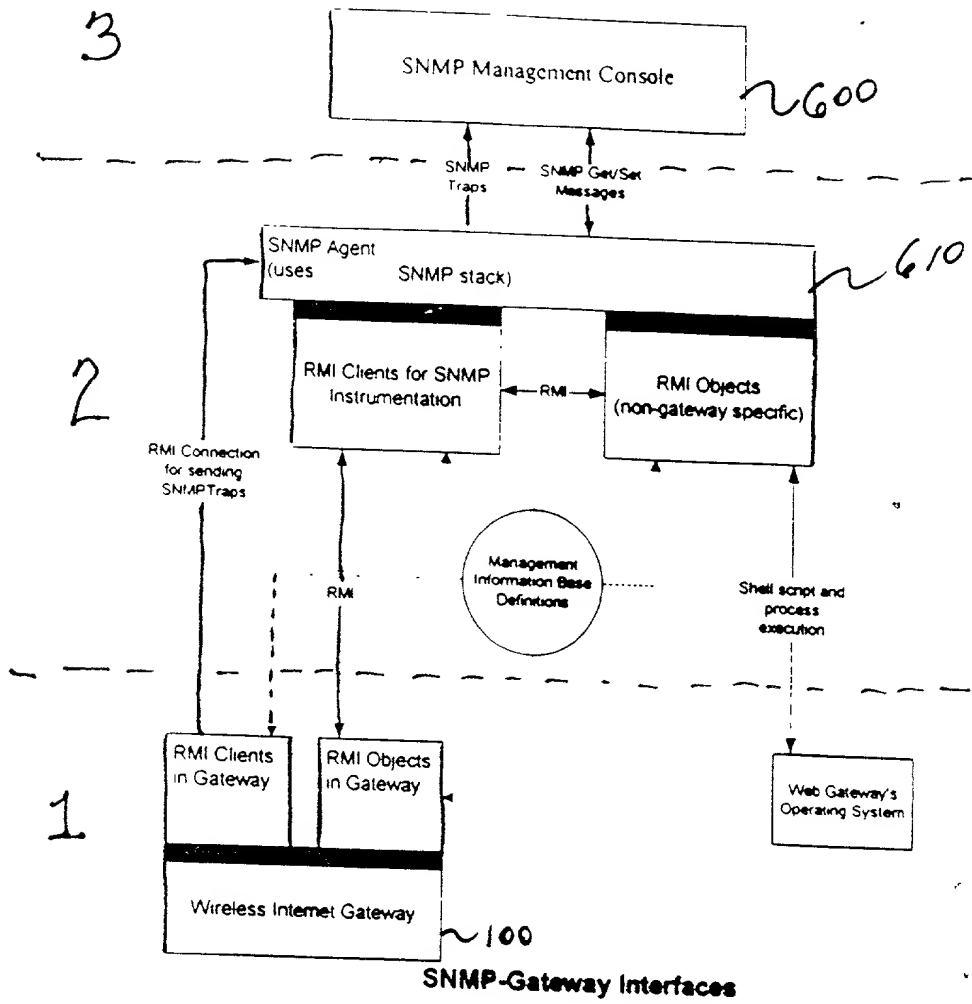


FIG. 3

002030" 24/06/2006

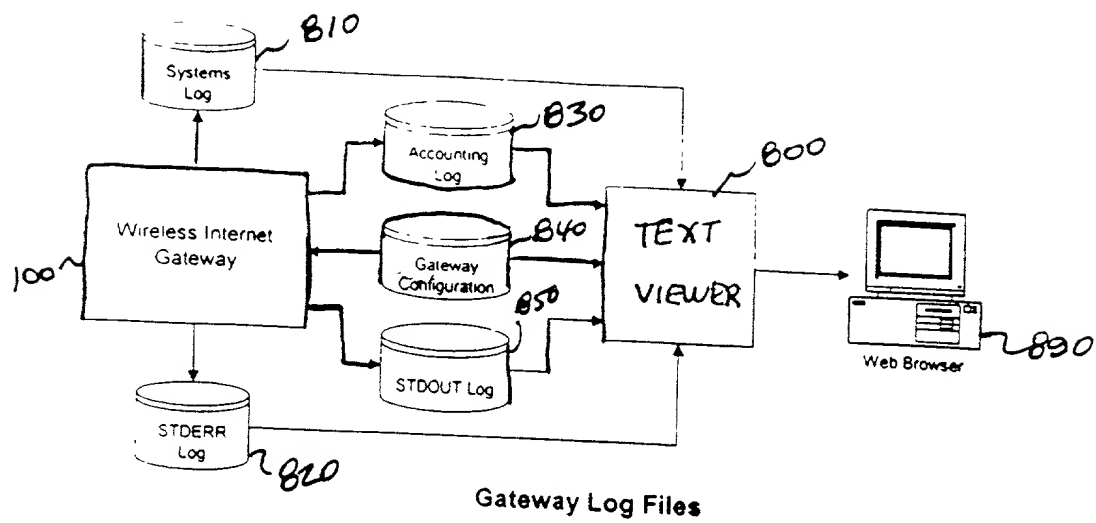


FIG. 4

```

# -----
#      smscgw conf:  Configuration File for TCS SMS Web Gateway
#                    (c) 1998,1999,2000 TCS, Inc.
# -----
# ----- Identification -----
GW_ID          A          # Msg Identifier for GW
GWName         admin@demossys.com # Email address for gw msgs
shutdown_MIN   0000000009      # MIN to shutdown gateway

# ----- System Output -----
basedir        /          # base location of files
accountinglogfile logs/acc log # account log file name
systemlogfile  logs/system log # system log file name
accountinglogfilelevel 9      # Level of accounting log detail
systemlogfilelevel 9        # Level of system log detail
debugmode      yes         # Sends SMPP info to StdOut
do_email_debug yes         # Show SMTP Interactions

smtpSocketTimeout 10        # Time socket waits for input
                        # before it times out
smtpSocketLinger  10        # Time OS keeps socket alive
                        # after application closes socket
smtpListenerSleepInterval 50 # Time (milliseconds) to pause
                        # between successive SMTP connections
                        # 50 milliseconds implies 200
                        # connections per second

# ----- Database References -----
MessageStoreType DB          # File System (FS) or Database
                        # (DB) storage or None or DB Cache(DBC)

# Connection information for accessing the Message Store
MessageStoreDbClass oracle.jdbc.driver.OracleDriver
MessageStoreDbUrl   jdbc:oracle:thin:@dbhost.demossys.com:1521:ORCL
MessageStoreDbAccount webdb
MessageStoreDbPW     private

msgLifespanHours  8          # How long to retain message data
requeIntervalSecs 60         # How often to requeue unack'd msgs

```

TABLE 1

```

q_cachepath          /cache/          # directory for unack'd msg indicators
q_msgpath            ./messages/      # directory for FS database files
PendingCacheThreshold 50
PollPendingCache 10

# ----- Features -----
enable_smtp          yes              # Enable Email Support
smtp_port            25               # Port for receiving email
enable_web           yes              # Enable RMI for Web (and other RMI clients)
enable_smpp           yes              # Enable SMPP output to SMSCs (reqd)
enable_calendar       no              # Enable Web Calendar support

enable_monitor        yes              # Enable free memory monitor
memoryCheckRestTime  180000           # ms time for checking avbl memory
memoryThreshold       256             # kb threshold for generating alert

msg_maxlen            90              # Max length in a single message
msg_link_maxlen       150             # Max total length of msg through linking

enable_antispam        yes              # Enable msg qty limitations
SpamMaxSendQty         100            # Max no. msgs that can be sent per period
SpamMaxRecvQty         100            # Max no. msgs that can be recvd per period
SpamTimePeriod         1              # Time period, in hours
SpamInvalidSenders     987.654.321.000 # Senders that are always refused
SpamValidSenders       admin@demossys.com # Sender exempt from anti-spam checks
SpamValidReceivers     9876543210,1234567890 # Receivers exempt from anti-spam checks

forceSNReturnReceipt  no              # Always request return receipt from SMSC

AlwaysDoEmailReceipt   no              # Always send a receipt to E-mail senders
AlwaysDoEmailReceipt_Exclude demossys.com # Senders to exclude if above is enabled

validateScheme         0              # 0=RANGE, 1=LOOSE, 2=EXPLICIT

supportAltAddressing   yes             # PIN/Alias lookups allowed
minLength              10             # Length of a valid MIN
pinLength              6              # Length of a valid PIN.
pinPrefix              P.             # Prefix to identify PINs

supportSubmitTranslate no              # Do User vs Submit Address (DN/MIN) xlation

heartbeatsecs          180             #seconds between heartbeats, 0 = no
heartbeat

# ----- Message Destinations -----
sn_count               1              # Number of SMSCs attached

sn_type0               tcs.ain.smsgw.SmsGWSNSHPPLink

serializeSmppTraffic yes

smpp_host0             localhost       # Host name of first SMSC
smpp_TXport0           7001           # SMPP Tx port for first SMSC
smpp_RXport0           7002           # SMPP Rx port for first SMSC
smpp_bind_password0    secret         # SMSC/SMPP Password
smpp_bind_sysID0       EE             # SMSC/SMPP System ID
smpp_bind_sysType0     INET GW        # SMPP Client identifier
smpp_valid_min_range0  3102800000 5102802000 0000000009 0000000009
smpp_template0         1              # SMSC Template for sending messages
smpp_callback_trigger0 $A             # Trigger for embedding callback number
smpp_message_trigger0  SM             # Trigger for identifying message text
smpp_service_type0     PAGE           # Service Type; Comment out for Aldiscon
smpp_src_addr_ton0     0              # Type of Number; TCS=0
smpp_src_addr_np10     0              # Numbering Plan Identity; TCS=0
smpp_dst_addr_ton0     1
smpp_dst_addr_np10     .

```

Table 1-Sample Gateway Configuration File (cont)

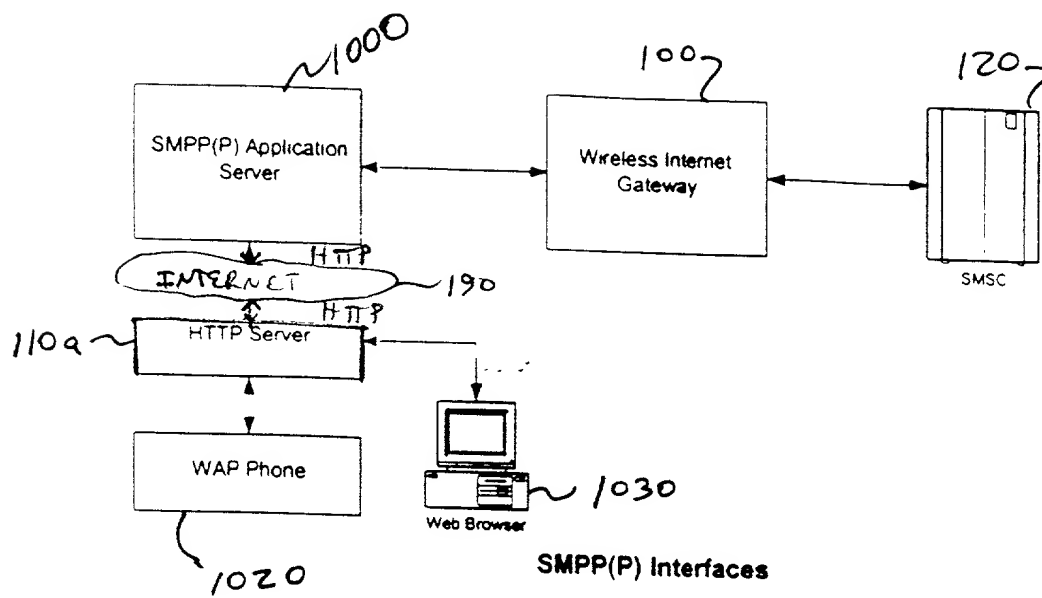


FIG. 5


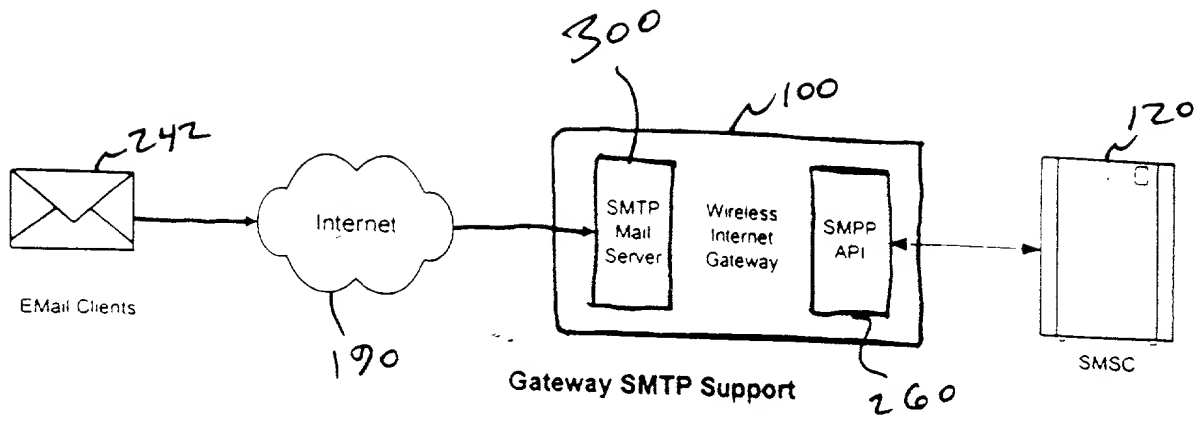


FIG. 6


002080" 29/02/96

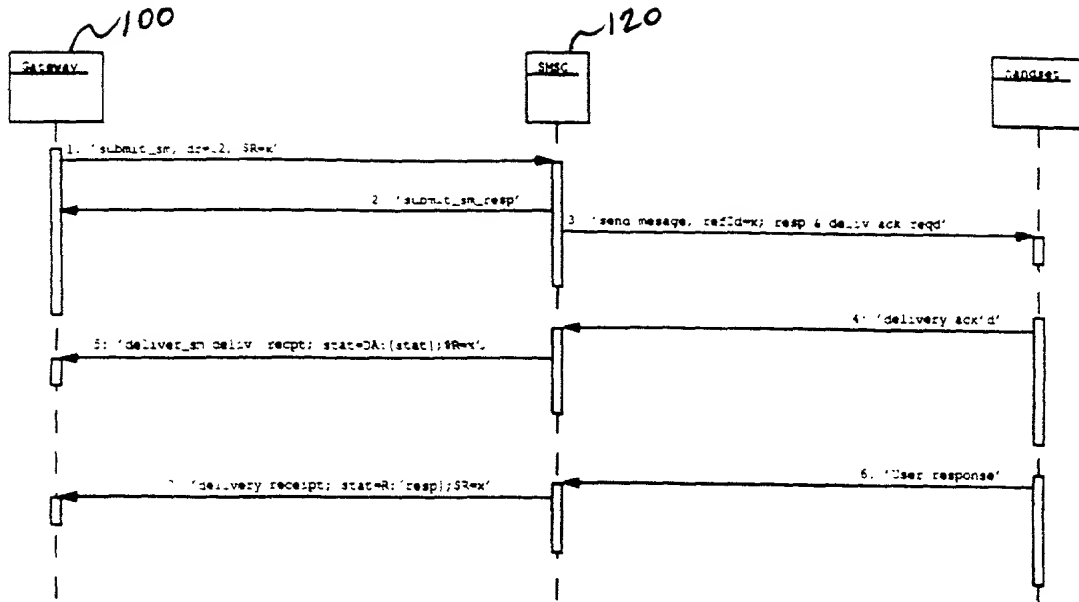

Mail Send/Receipt Process from Gateway

FIG. 7A


002080 23/05/96

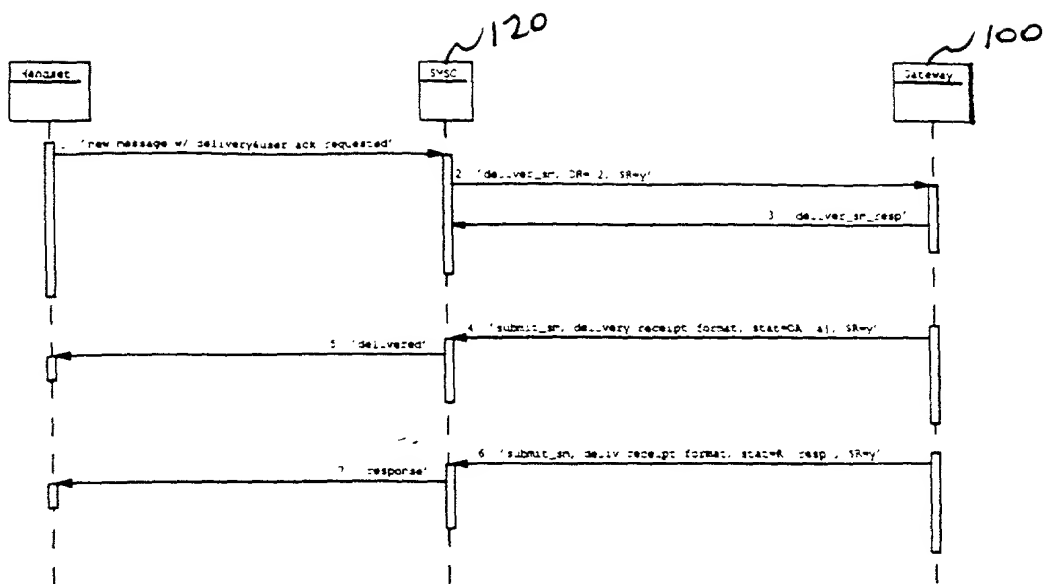

Mail Send/Receipt Process from Handset

FIG. 7B

002030"2340650

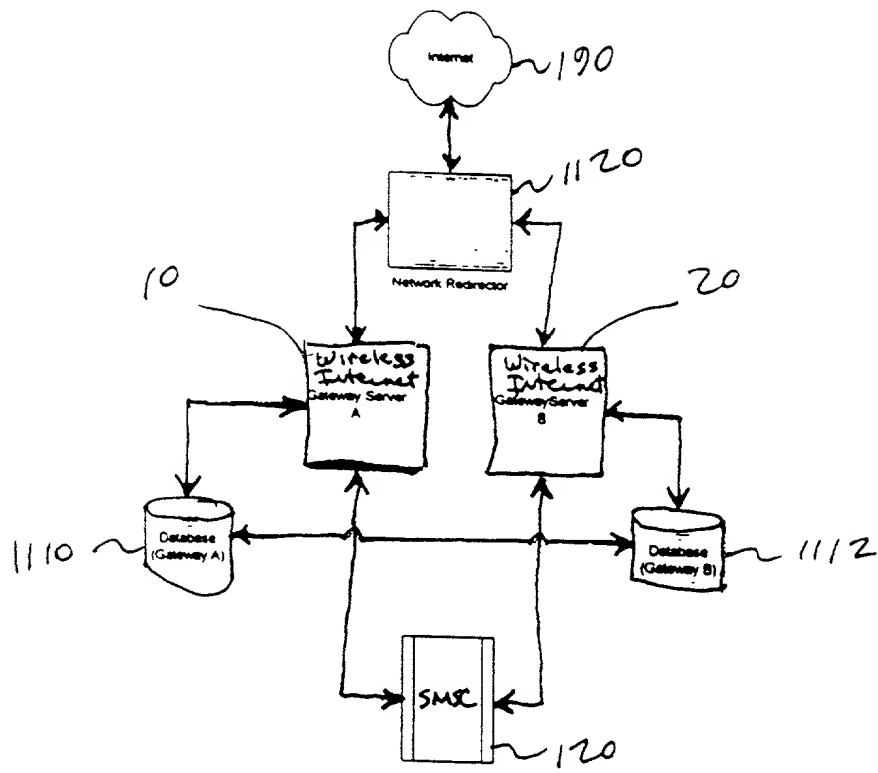

Redundant Configuration
of Wireless Internet Gateways

FIG. 8

1. Demographic characteristics	
Age (years)	45.2 (SD 12.5)
Gender	Male 58.5%, Female 41.5%
Marital status	Married 65.2%, Single 18.7%, Divorced 12.3%, Widowed 3.8%
Education (years)	12.1 (SD 2.3)
Occupation	Professional 25.4%, Managerial 18.9%, Skilled 32.1%, Unskilled 23.6%
2. Clinical characteristics	
Duration of illness (years)	3.2 (SD 2.1)
Severity of illness	Mild 35.2%, Moderate 42.8%, Severe 22.0%
Previous hospitalizations	0-2 45.1%, 3-5 32.4%, >5 22.5%
3. Treatment characteristics	
Medication adherence	High 55.3%, Low 44.7%
Therapeutic response	Partial 38.9%, No response 61.1%
Side effects	Present 28.7%, Absent 71.3%
4. Psychosocial outcomes	
Depression score	15.2 (SD 8.5)
Anxiety score	12.8 (SD 7.2)
Quality of life score	45.1 (SD 15.3)
Social support score	32.4 (SD 12.1)
Stigma score	28.9 (SD 10.5)
5. Health service utilization	
Primary care visits	4.2 (SD 2.8)
Specialist visits	2.1 (SD 1.5)
Hospital admissions	1.5 (SD 1.2)
Emergency department visits	0.8 (SD 0.6)
Cost of care	\$1,250 (SD \$450)

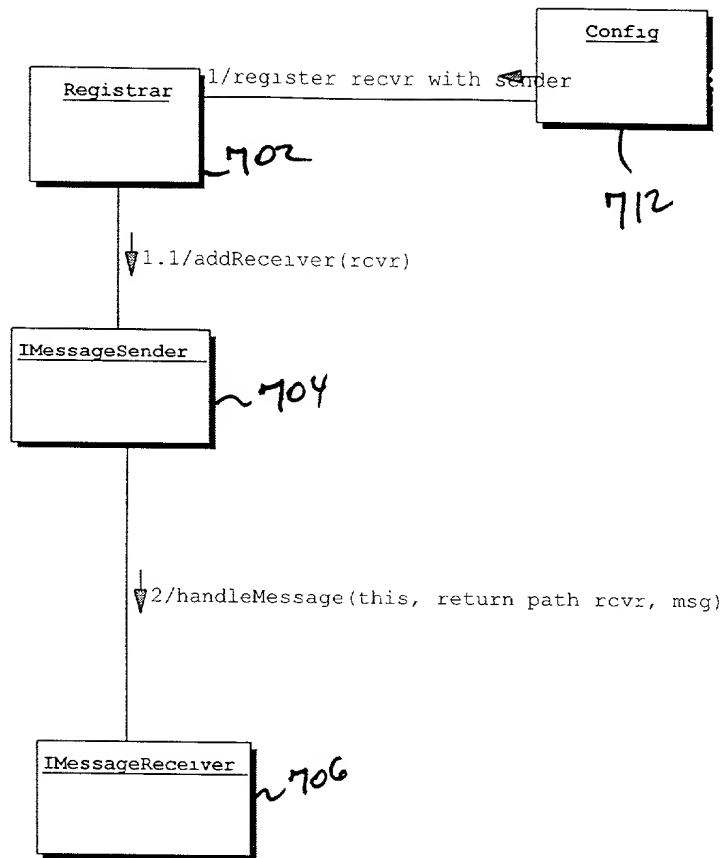


FIG. 9A

```
sequenceDiagram
    participant User
    participant Registrar
    participant Config
    participant IMessageSender
    participant IMessageReceiver
    participant TwoWaySmtplistenerAgent as 2way SmtplistenerAgent
    participant App
    participant SMTPDeliveryAgent

    Registrar->>Config: 1/register rcvwr with sender
    Registrar->>TwoWaySmtplistenerAgent: 1 1/add receiver(agent)
    User->>TwoWaySmtplistenerAgent: 2/send(msg)
    TwoWaySmtplistenerAgent->>App: 2 1/process(this,smtp_deliv agent, msg)
    User->>SMTPDeliveryAgent: 3.1/send(msg)
    SMTPDeliveryAgent->>User: 3/process(this, return path rcvwr, msg)

    TwoWaySmtplistenerAgent..>>IMessageSender: <<derive>>
    App..>>IMessageSender: <<derive>>
    App..>>IMessageReceiver: <<derive>>
    App..>>SMTPDeliveryAgent: <<derive>>
```

FIG. 9B

RMI Scenario

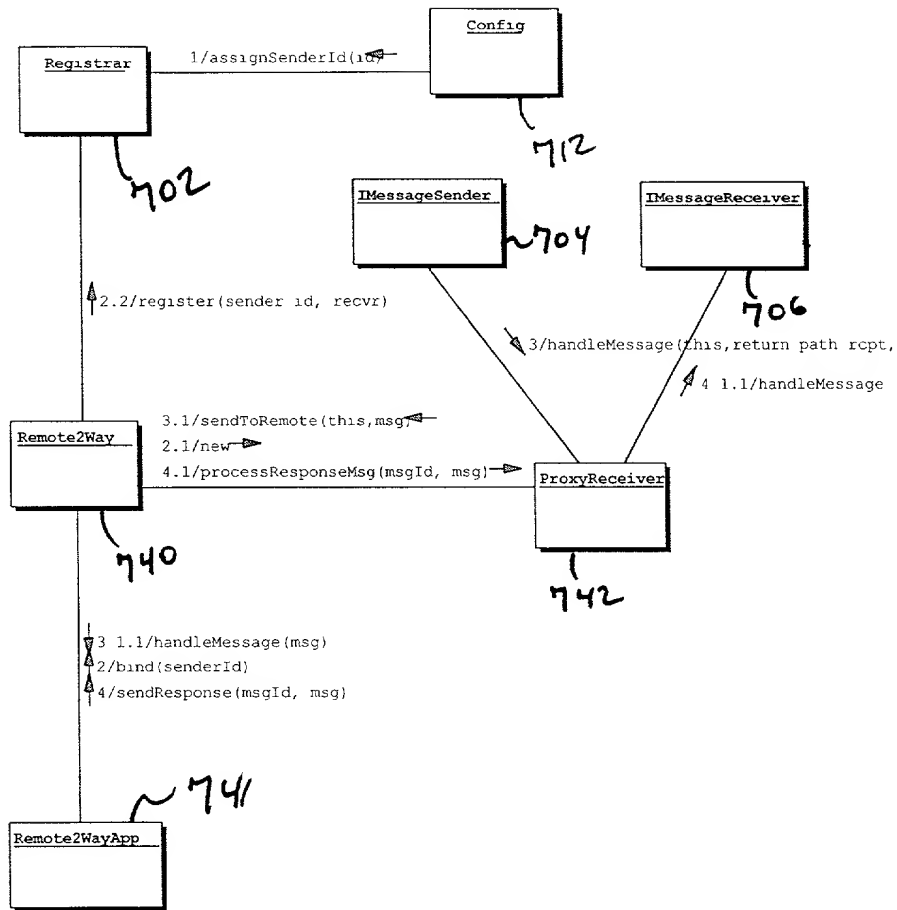


FIG. 9C

Core

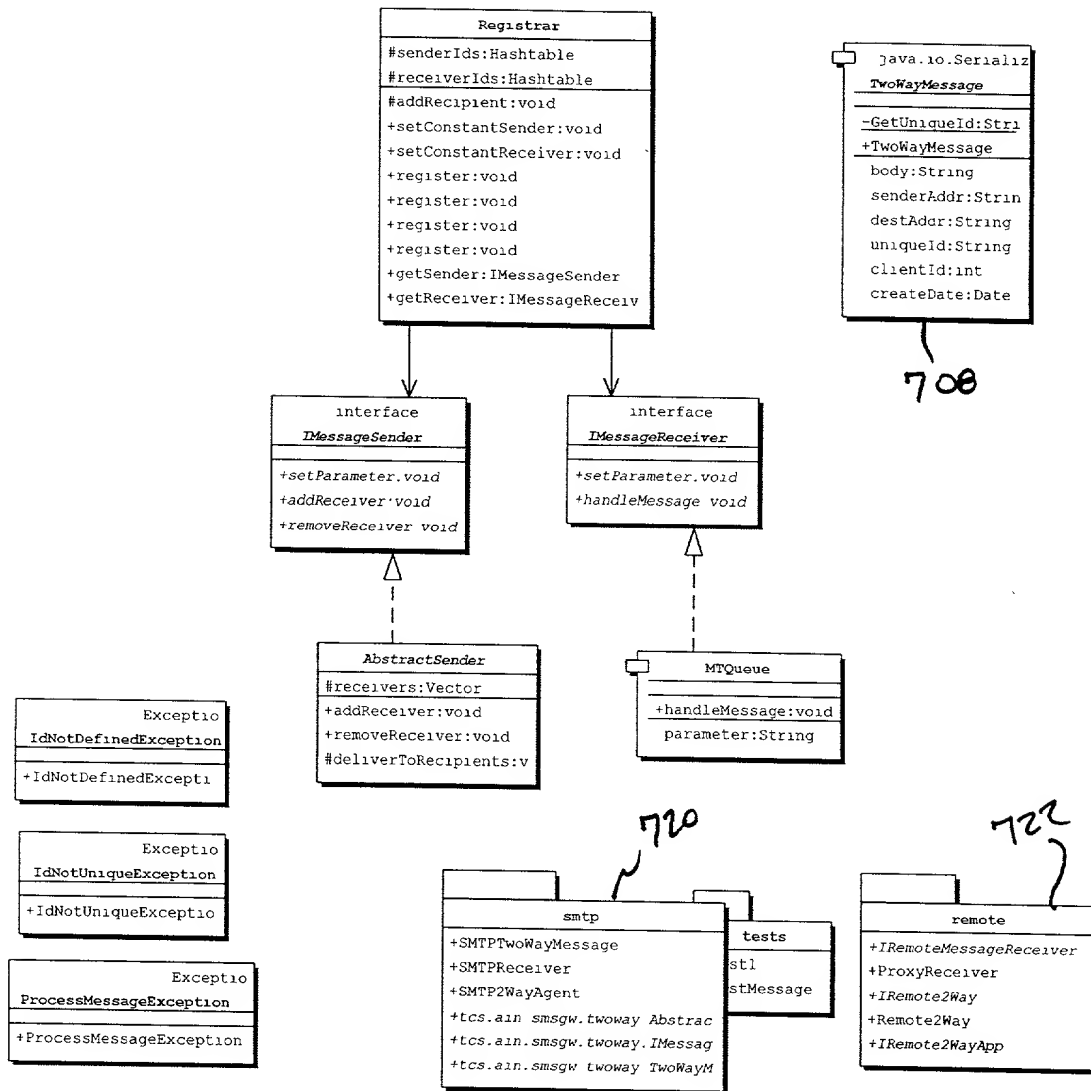


FIG. 10A

Remote

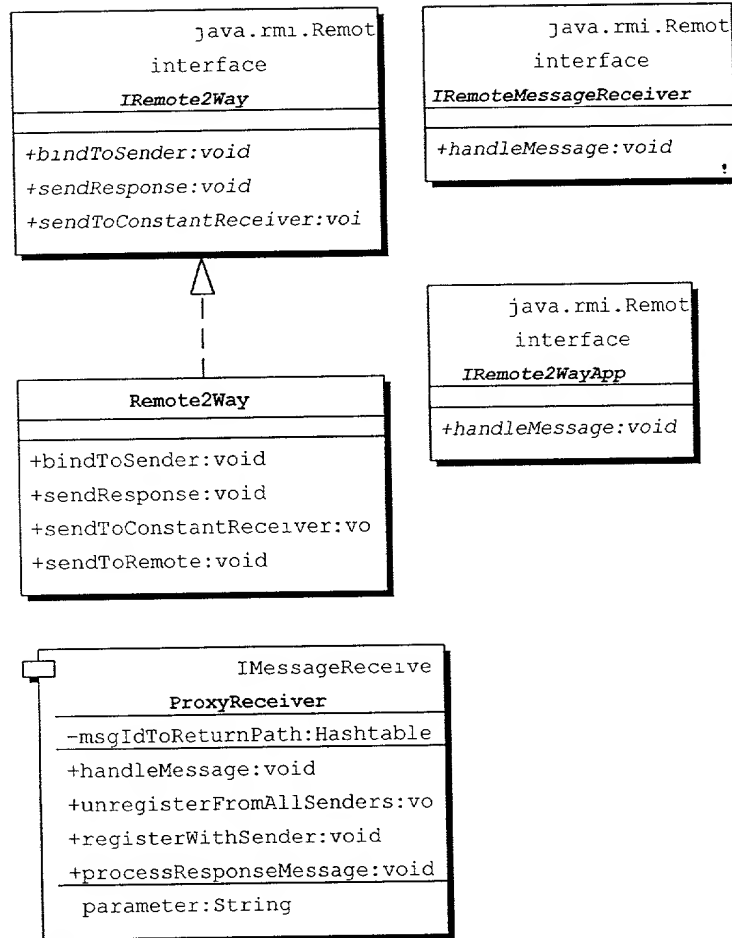


FIG. 10B

SMTP


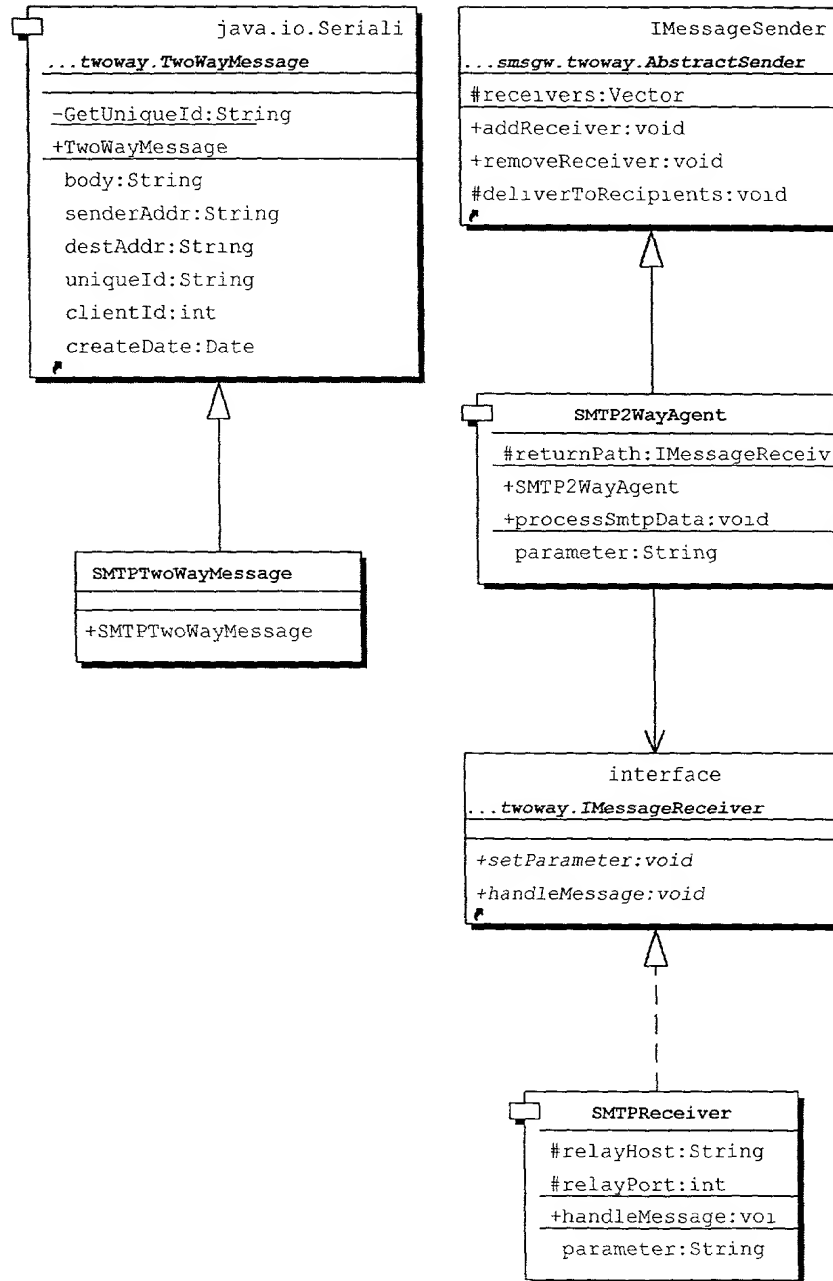


FIG. 10C

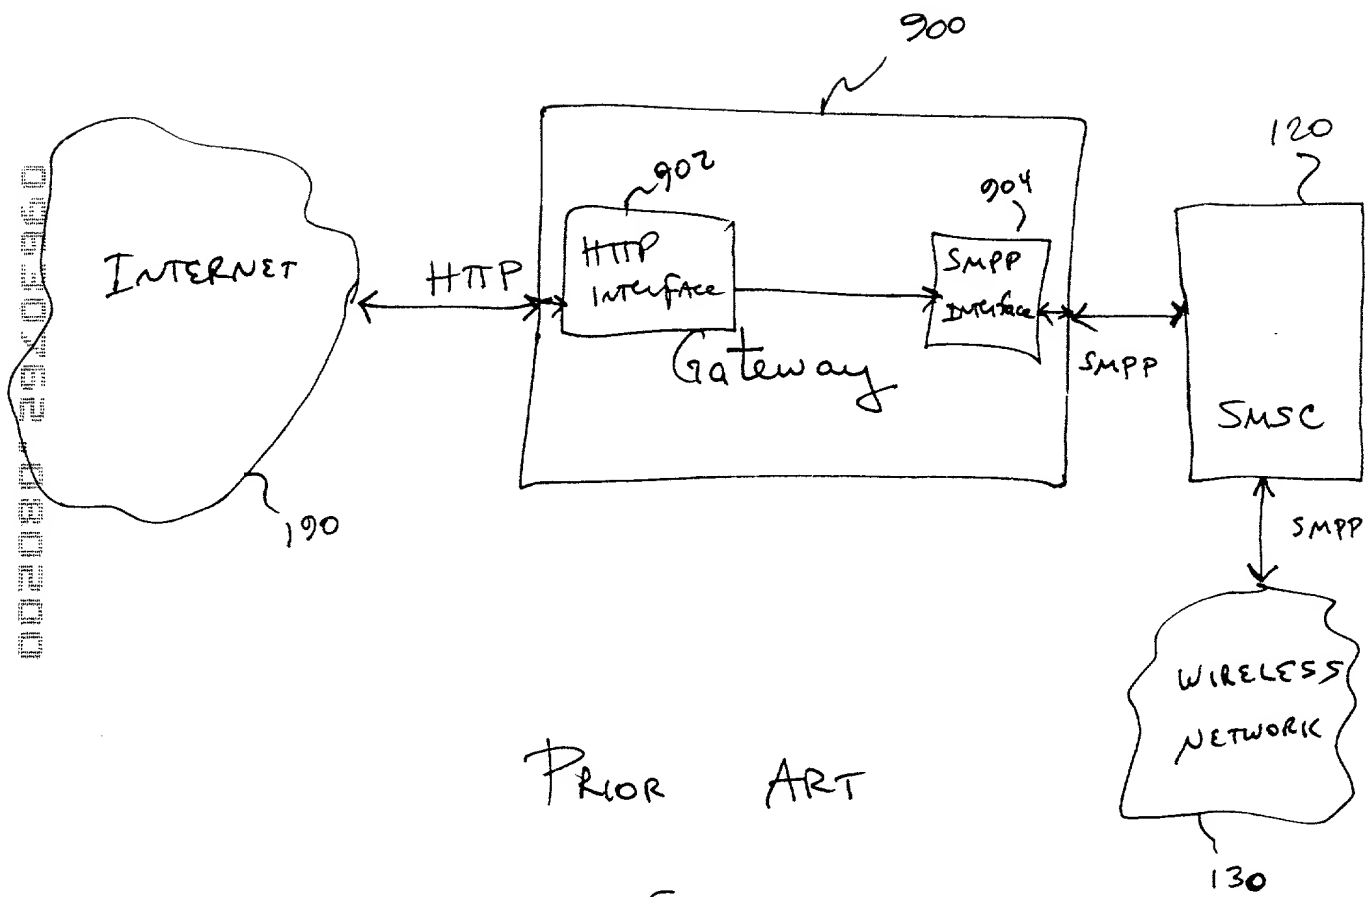

Prior Art

FIG. 11

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Declaration and Power of Attorney

As below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **WIRELESS INTERNET GATEWAY**, the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by an amendment, if any, specifically referred to in this oath or declaration.

I acknowledge the duty to disclose all information known to me which is material to patentability as defined in Title 37, Code of Federal Regulations, 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

None

I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:


U.S. Provisional Application Serial No. 60/199,367, filed April 25, 2000

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

William H. Bollman	(Reg. No. 36,457)
Edward J. Stemberger	(Reg. No. 36,017)
Jeffrey S. Melcher	(Reg. No. 35,950)
W. Warren Taltavul	(Reg. No. 25,647)
Leon R. Turkevich	(Reg. No. 34,035)

Please address all correspondence to **FARKAS & MANELLI PLLC, 2000 M Street, N.W. Suite 700, Washington, DC 20036-3307**, and all telephone calls to **William H. Bollman at (202) 261-1020**.

Full name of 1st inventor: **Richard A. Smith**

Inventor's signature  Date: 8/1/00
Residence: **Annapolis, Anne Arundel County, Maryland**
Citizenship: **USA**
Post Office Address: **12 North Southwoods Avenue, Annapolis, Maryland 21401**